FORESTRY MULCHERS FOR EXCAVATORS

DML/HY

Forestry mulcher with fixed tooth rotor for excavators.

The DML/HY forestry mulcher for 5-13 ton excavators can shred material up to 12 cm in diameter. This head is highly flexible in managing overgrowth, with shredding results always in line with the desired finish. It features two hoods for shredding both standing trees and ground or low-height material that does not need to be felled, such as branches or shrubs. The DML/HY can be equipped with BL/MINI blades or C/3/MINI teeth.

50-200 L/min

Ø 12 cm max

5-13 t

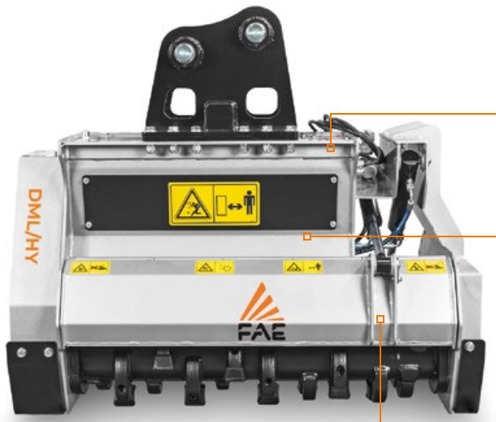

VT motor
to increase performance
and reduce operating costs

Counter blades
helps mulch material into a smaller final size

Hydraulic rear hood
(optional)

Hydraulic hood systems
(front and rear optional) for excellent mulching when operating in either direction

Flow control valve
to protect the motor from excessive flow

MAIN OPTIONS

Customized attachment bracket kit with pins

Diverter valve system
to control the opening and closing of the front and rear hydraulic hood

Customized setting hydraulic motor

Customized attachment bracket kit with pins and support leg

STANDARD EQUIPMENT

17-34 cc hydraulic piston motor (DML/HY)	Front hood with mechanical adjustment
55 cc VT hydraulic piston motor (DML/HY/VT)	Rear hood with mechanical adjustment
Flow Control system valve with integrated safety and anticavitation valves	Interchangeable protection chains
Enclosed, dust-resistant machine body	Supporting leg
Motor enclosed in the frame	Welded counter blades
Trapezoidal belts transmission	Interchangeable forged steel rotor shafts
Fittings for hydraulic connections	

OPTIONS

32-65 cc hydraulic piston motor (DML/HY)	Hydraulically adjustable front hood
Customized setting hydraulic motor	Customized attachment bracket kit with customized pins
Diverter valve	Customized attachment bracket kit with customized pins and support leg
Hydraulically adjustable rear hood	Multiple tooth options
12V Diverter valve	Control box for Diverter valve
24V Diverter valve	Bite Limiter Rotor

MODEL	DML/HY-75	DML/HY-100	DML/HY-125	DML/HY/VT-75*	DML/HY/VT-100*	DML/HY/VT-125*
Flow rate (L/min)	50-200	50-200	50-200	80-135	80-135	80-135
Pressure (bar)	180-350	180-350	180-350	180-350	180-350	180-350
Excavator weight (t)	5-13	5-13	5-13	5-13	5-13	5-13
Working width (mm)	800	1000	1240	800	1000	1240
Weight (kg)	407	437	507	412	442	512
Rotor diameter (mm)	310	310	310	310	310	310
Max shredding diameter (mm)	120	120	120	120	120	120
No. blades type BL/MINI	16	20	26	16	20	26

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.
**Variable displacement hydraulic motor.*

ROTOR TYPE BL

BLADE BL/MINI
(standard)

TOOTH C/3/MINI
(option)